

SMD ■ MID Power LED

62-217D/KK5C-HXXXXXXXXX2532Z6/2T(HN)



Features

- PLCC-2 package
- Top view white LED
- High luminous intensity output
- Wide viewing angle
- Pb-free
- RoHS compliant
- ANSI Binning

Description

The Everlight 62-217D package has high efficacy, high CRI, low power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

Applications

- General lighting
- Decorative and Entertainment Lighting
- Indicators
- Illumination
- Switch lights

Product Number Explanation

62-217D / K K 5 C – H XX XX XX XX XXXX Z6 / 2T

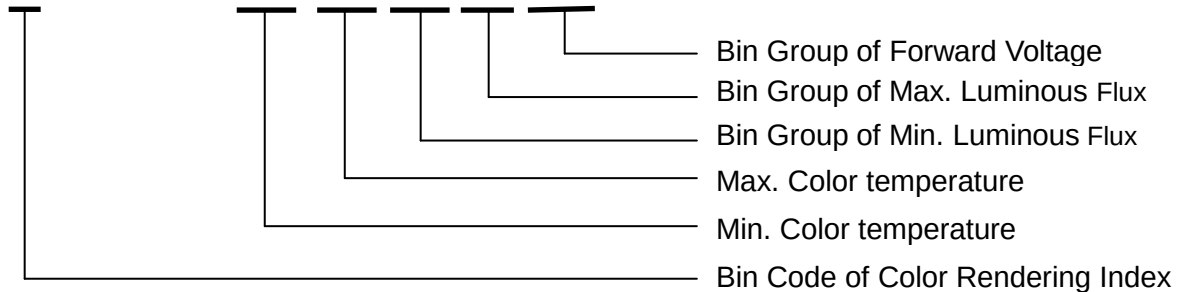


Table of Color Rendering Index

Symbol	Description
M	CRI(Min.) : 60
N	CRI(Min.) : 65
L	CRI(Min.) : 70
Q	CRI(Min.) : 75
K	CRI(Min.) : 80
P	CRI(Min.) : 85
H	CRI(Min.) : 90

Note:
Tolerance of Color Rendering Index: ± 2

Table of Forward Current Index

Symbol	Description
Z6	I_F :60mA

Example:
62-217D/KK5C-H3030N4P02532Z6/2T(HN)

CRI	80(Min.)
CCT	3000K
Flux	27~36lm
V_F	2.5~3.2V
I_F	60mA

Mass Production List

Product	CRI Min. (1)	CCT(K)	Φ(lm) Min. (2)	Φ(lm) Max. (2)
62-217D/KK5C-H2727N31P02532Z6/2T(HN)	80	2700K	25	36
62-217D/KK5C-H3030N4P02532Z6/2T(HN)	80	3000K	27	36
62-217D/KK5C-H3535N4P02532Z6/2T(HN)	80	3500K	27	36
62-217D/KK5C-H4040N41PA2532Z6/2T(HN)	80	4000K	28	40
62-217D/KK5C-H5050N42PA2532Z6/2T(HN)	80	5000K	29	40
62-217D/KK5C-H5757N42PA2532Z6/2T(HN)	80	5700K	29	40
62-217D/KK5C-H6565N41PA2532Z6/2T(HN)	80	6500K	28	40

Notes:

1. Tolerance of Color Rendering Index: ± 2
2. Tolerance of Luminous flux: $\pm 11\%$.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
InGaN	Cool White Neutral White Warm White	Water Clear

Absolute Maximum Ratings (T_{Soldering}=25°C)

Parameter	Symbol	Rating	Unit
Forward Current	I _F	200	mA
Peak Forward Current (Duty 1/10 @10ms)	I _{FP}	100	mA
Power Dissipation	P _d	270	mW
Operating Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Thermal Resistance (Junction / Soldering point)	R _{th J-S}	28	°C/W
Junction Temperature	T _j	115	°C
Soldering Temperature	T _{sol}	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.	

Note:

The products are sensitive to static electricity and must be carefully taken when handling products

Electro-Optical Characteristics (T_{Soldering}=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux ₍₁₎	Φ	25	-----	40	lm	I _F =60mA
Forward Voltage ₍₂₎	V _F	2.5	-----	3.2	V	I _F =60mA
Color Rendering Index ₍₃₎	Ra	80	-----	-----		I _F =60mA
	R9	0	-----	-----	-----	I _F =60mA
Viewing Angle	2θ _{1/2}	-----	120	-----	deg	I _F =60mA
Reverse Current	I _R	-----	-----	50	μA	V _R =5V

Notes:

1. Tolerance of Luminous flux: ±11%.
2. Tolerance of Forward Voltage: ±0.1V.
3. Tolerance of Color Rendering Index: ±2

Bin Range of Luminous Flux

Bin Code	Min.	Max.	Unit	Condition
N3-2526	25	26	lm	$I_F=60\text{mA}$
N3-2627	26	27		
N4-2728	27	28		
N4-2829	28	29		
N4-2930	29	30		
N4B	30	33		
P0	33	36		
PA	36	40		


Note:
Tolerance of Luminous flux: $\pm 11\%$.

Bin Range of Forward Voltage

Group	Bin Code	Min.	Max.	Unit	Condition
2532	32	2.5	2.6	V	$I_F=60\text{mA}$
	33	2.6	2.7		
	34	2.7	2.8		
	35	2.8	2.9		
	36	2.9	3.0		
	37	3.0	3.1		
	38	3.1	3.2		

Note:
Tolerance of Forward Voltage: $\pm 0.1\text{V}$.

The C.I.E. 1931 Chromaticity Diagram

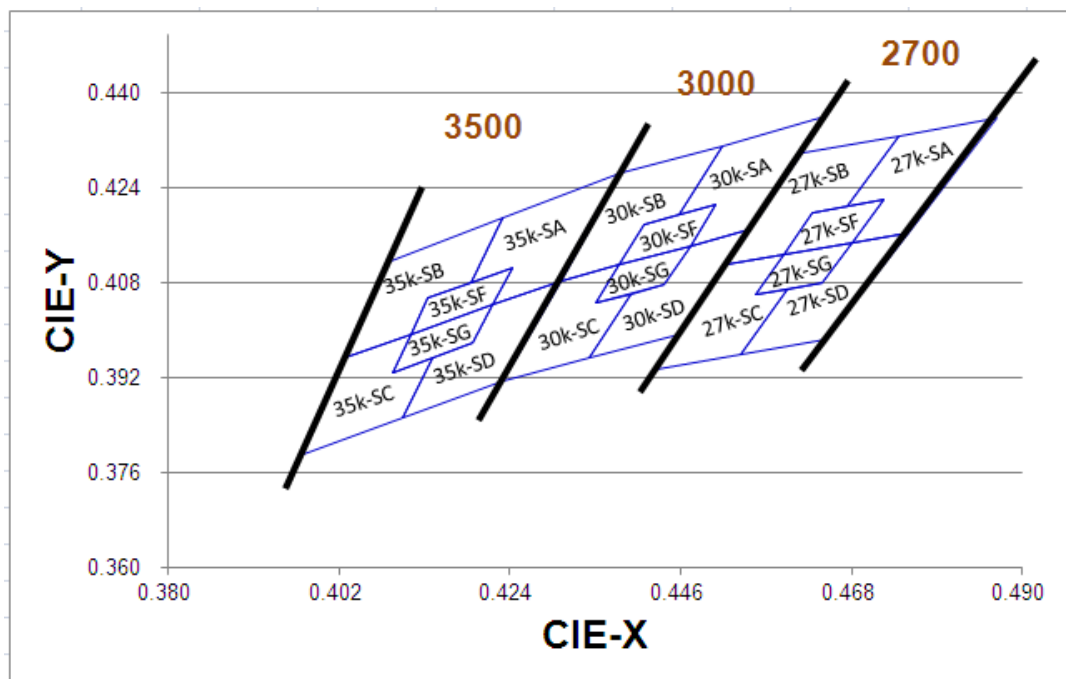


Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
2700K	27K-SA	0.4867	0.4359	27K-SD	0.4754	0.4166
		0.4741	0.4329		0.4681	0.4149
		0.4675	0.4209		0.4642	0.4081
		0.4721	0.4220		0.4598	0.4070
		0.4681	0.4149		0.4537	0.3959
		0.4754	0.4166		0.4647	0.3984
	Reference Range:2540K~2680K					
	27K-SB	0.4741	0.4329	27K-SC	0.4519	0.4111
		0.4616	0.4300		0.4427	0.3933
		0.4519	0.4111		0.4537	0.3959
		0.4593	0.4128		0.4598	0.4070
		0.4630	0.4198		0.4556	0.4060
		0.4675	0.4209		0.4593	0.4128
	Reference Range:2675K~2825K					
	27K-SF	0.4721	0.4220	27K-SG	0.4681	0.4149
		0.4630	0.4198		0.4593	0.4128
		0.4593	0.4128		0.4556	0.4060
		0.4681	0.4149		0.4642	0.4081
	Reference Range: 2620K~2730K					

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
3000K	30K-SA	0.4646	0.4360	30K-SD	0.4549	0.4171
		0.4514	0.4312		0.4472	0.4143
		0.4459	0.4196		0.4439	0.4077
		0.4506	0.4213		0.4395	0.4062
		0.4472	0.4143		0.4343	0.3953
		0.4549	0.4171		0.4457	0.3993
	Reference Range:2820K~2970K					
	30K-SB	0.4514	0.4312	30K-SC	0.4305	0.4084
		0.4383	0.4265		0.4231	0.3914
		0.4305	0.4084		0.4343	0.3953
		0.4381	0.4111		0.4395	0.4062
		0.4412	0.4179		0.4351	0.4046
		0.4459	0.4196		0.4381	0.4111
	Reference Range:2970K~3135K					
	30K-SF	0.4506	0.4213	30K-SG	0.4472	0.4143
		0.4412	0.4179		0.4381	0.4111
		0.4381	0.4111		0.4351	0.4046
		0.4472	0.4143		0.4439	0.4077
	Reference Range:2910K~3030K					

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
3500K	35K-SA	0.4383	0.4265	35K-SD	0.4305	0.4084
		0.4232	0.4190		0.4218	0.4043
		0.4190	0.4081		0.4192	0.3978
		0.4243	0.4107		0.4141	0.3953
		0.4218	0.4043		0.4102	0.3852
		0.4305	0.4084		0.4231	0.3914
	Reference Range:3130K~3360K					
	35K-SB	0.4232	0.4190	35K-SC	0.4027	0.3953
		0.4080	0.4115		0.3973	0.3790
		0.4027	0.3953		0.4102	0.3852
		0.4113	0.3993		0.4141	0.3953
		0.4135	0.4054		0.4090	0.3929
		0.4190	0.4081		0.4113	0.3993
	Reference Range:3360K~3610K					
	35K-SF	0.4243	0.4107	35K-SG	0.4218	0.4043
		0.4135	0.4054		0.4113	0.3993
		0.4113	0.3993		0.4090	0.3929
		0.4218	0.4043		0.4192	0.3978
	Reference Range:3260K~3450K					


The C.I.E. 1931 Chromaticity Diagram

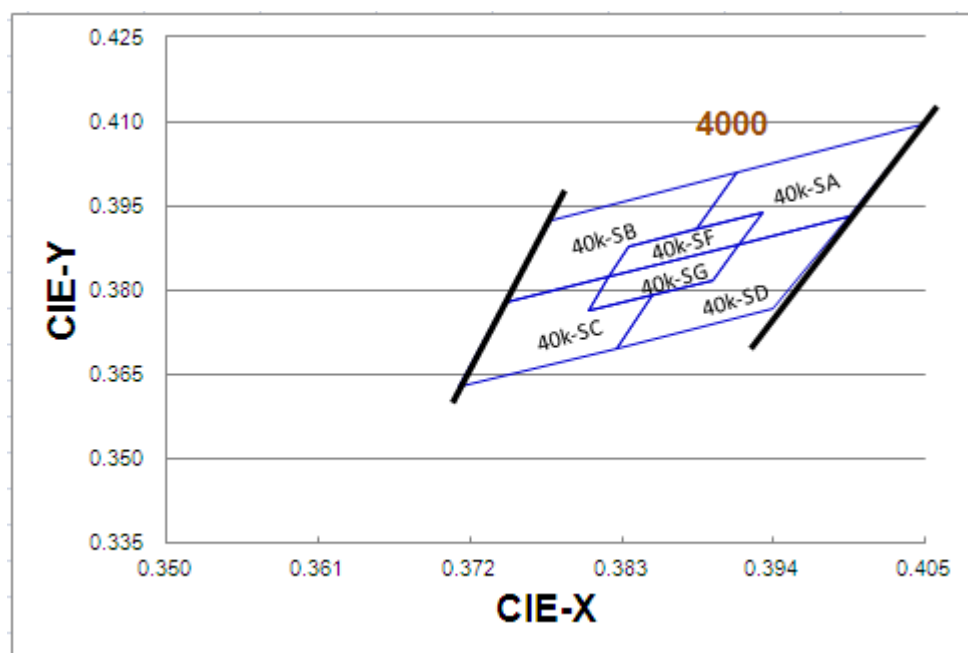

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
4000K	40K-SA	0.4048	0.4094	40K-SD	0.3994	0.3930
		0.3913	0.4009		0.3915	0.3881
		0.3885	0.3908		0.3896	0.3818
		0.3932	0.3937		0.3852	0.3791
		0.3915	0.3881		0.3826	0.3697
		0.3994	0.3930		0.3940	0.3766
	Reference Range:3650K~3900K					
	40K-SB	0.3913	0.4009	40K-SC	0.3745	0.3776
		0.3778	0.3924		0.3712	0.3628
		0.3745	0.3776		0.3826	0.3697
		0.3821	0.3823		0.3852	0.3791
		0.3835	0.3878		0.3806	0.3763
		0.3885	0.3908		0.3821	0.3823
	Reference Range:3900K~4180K					
	40K-SF	0.3932	0.3937	40K-SG	0.3915	0.3881
		0.3835	0.3878		0.3821	0.3823
		0.3821	0.3823		0.3806	0.3763
		0.3915	0.3881		0.3896	0.3818
	Reference Range:3800K~4000K					

The C.I.E. 1931 Chromaticity Diagram

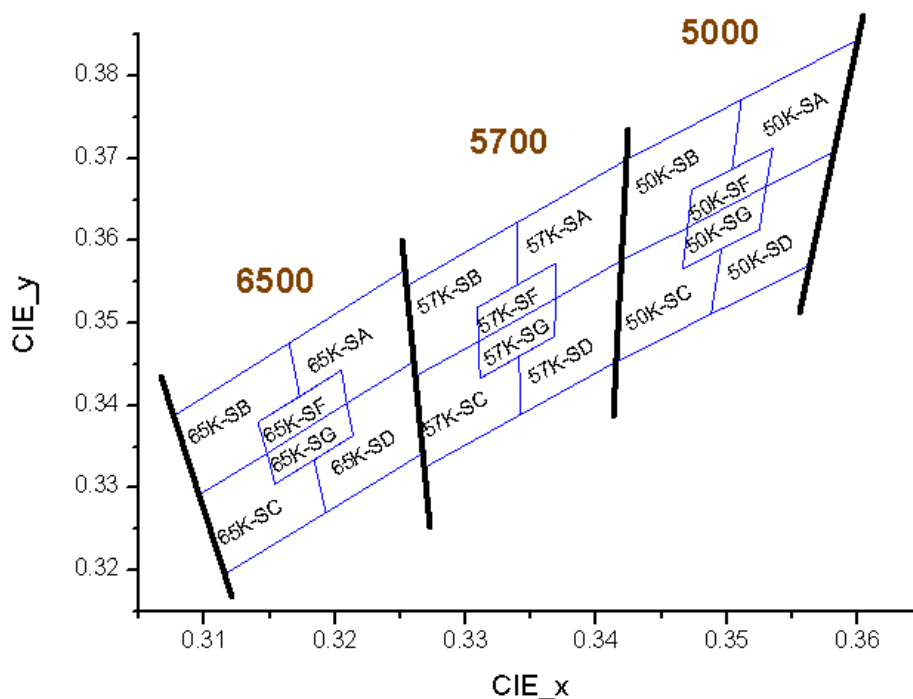

Bin Range of Chromaticity Coordinates

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
5000K	50K-SA	0.3599	0.3843	50K-SD	0.3581	0.3707
		0.3511	0.3771		0.3530	0.3666
		0.3504	0.3687		0.3525	0.3613
		0.3535	0.3712		0.3496	0.3590
		0.3530	0.3666		0.3488	0.3511
		0.3581	0.3707		0.3563	0.3570
	Reference Range:4630K~4880K					
	50K-SB	0.3511	0.3771	50K-SC	0.3419	0.3576
		0.3424	0.3699		0.3414	0.3452
		0.3419	0.3576		0.3488	0.3511
		0.3470	0.3616		0.3496	0.3590
		0.3473	0.3662		0.3466	0.3566
		0.3504	0.3687		0.3470	0.3616
	Reference Range:4870K~5150K					
	50K-SF	0.3535	0.3712	50K-SG	0.3530	0.3666
		0.3473	0.3662		0.3470	0.3616
		0.3470	0.3616		0.3466	0.3566
		0.3530	0.3666		0.3525	0.3613
	Reference Range:4770K~4970K					


CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
5700K	57K-SA	0.3424	0.3699	57K-SD	0.3419	0.3576
		0.3339	0.3622		0.3369	0.3530
		0.3340	0.3547		0.3368	0.3484
		0.3369	0.3573		0.3341	0.3460
		0.3369	0.3530		0.3342	0.3389
		0.3419	0.3576		0.3414	0.3452
	Reference Range:5140K~5450K					
	57K-SB	0.3339	0.3622	57K-SC	0.3262	0.3436
		0.3255	0.3545		0.3270	0.3326
		0.3262	0.3436		0.3342	0.3389
		0.3310	0.3478		0.3341	0.3460
		0.3309	0.3519		0.3311	0.3433
		0.3340	0.3547		0.3310	0.3478
	Reference Range:5440K~5790K					
	57K-SF	0.3369	0.3573	57K-SG	0.3369	0.3530
		0.3309	0.3519		0.3310	0.3478
		0.3310	0.3478		0.3311	0.3433
		0.3369	0.3530		0.3368	0.3484
	Reference Range:5320K~5570K					

CCT	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
6500K	65K-SA	0.3253	0.3564	65K-SD	0.3261	0.3454
		0.3165	0.3476		0.3209	0.3403
		0.3173	0.3411		0.3214	0.3364
		0.3205	0.3443		0.3184	0.3334
		0.3209	0.3403		0.3193	0.3270
		0.3261	0.3454		0.3269	0.3344
	Reference Range:5800K~6210K					
	65K-SB	0.3165	0.3476	65K-SC	0.3096	0.3292
		0.3076	0.3387		0.3116	0.3196
		0.3096	0.3292		0.3193	0.3270
		0.3148	0.3342		0.3184	0.3334
		0.3141	0.3380		0.3154	0.3305
		0.3173	0.3411		0.3148	0.3342
	Reference Range:6210K~6700K					
	65K-SF	0.3205	0.3443	65K-SG	0.3209	0.3403
		0.3141	0.3380		0.3148	0.3342
		0.3148	0.3342		0.3154	0.3305
		0.3209	0.3403		0.3214	0.3364
	Reference Range:6040K~6380K					

Notes:

1. The value is based on driving current by 60mA.
2. Tolerance of Chromaticity Coordinates: ± 0.01 .

Spectrum Distribution

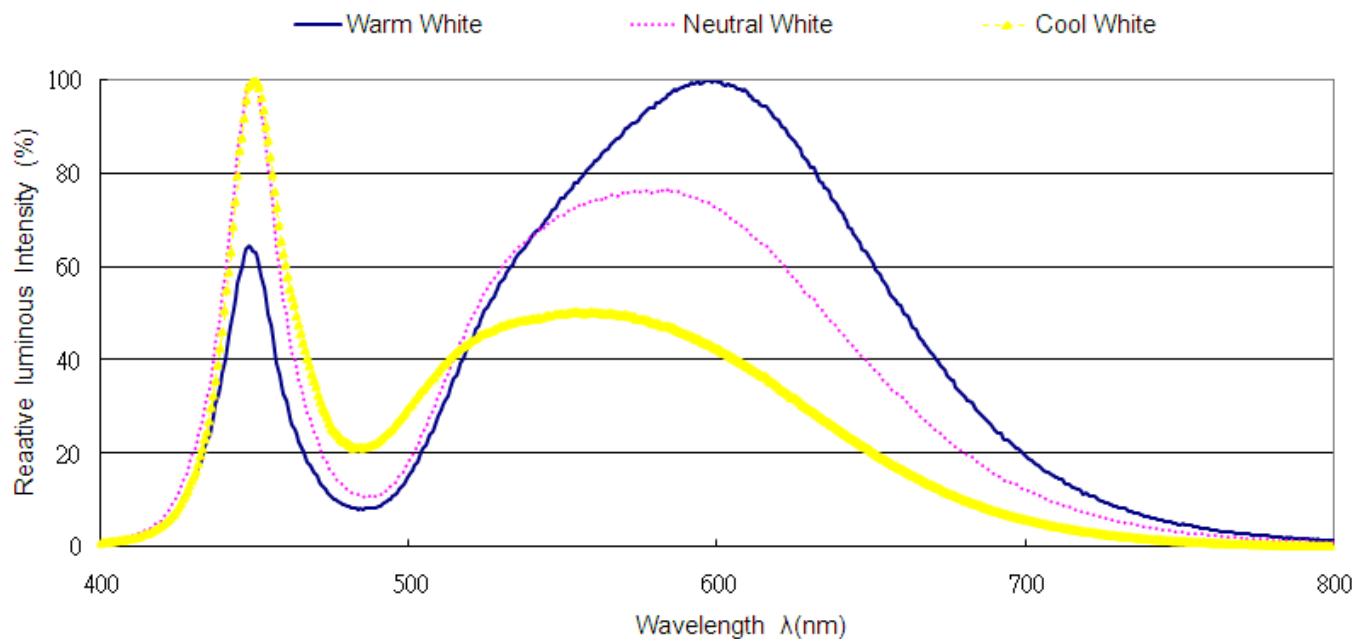

Typical Electro-Optical Characteristics Curves

Fig.1 – Forward Voltage Shift vs. Junction Temperature


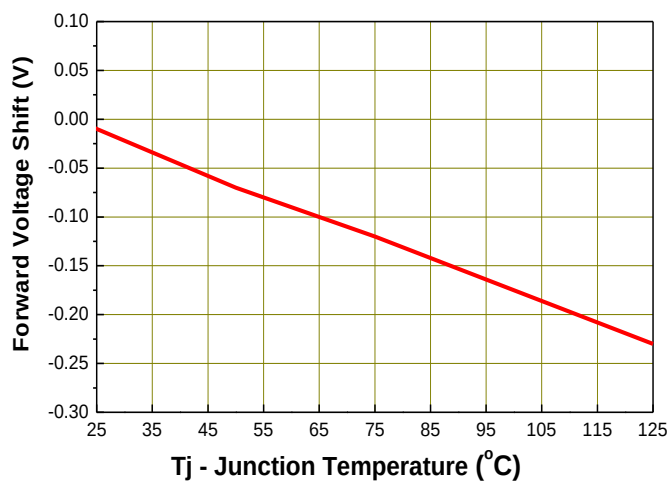


Fig.2 - Relative Luminous Intensity vs. Forward Current

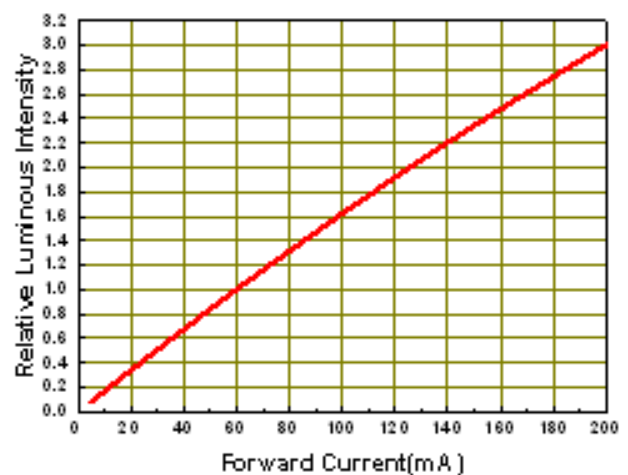

Typical Electro-Optical Characteristics Curves

Fig.3 - Relative Luminous Intensity vs. Junction Temperature

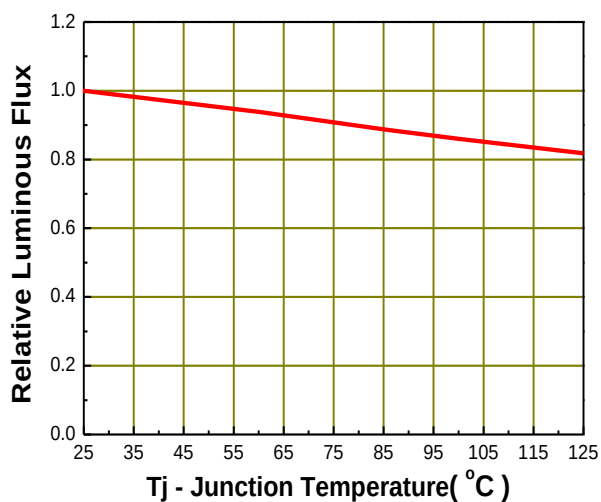


Fig.4 - Forward Current vs. Forward Voltage

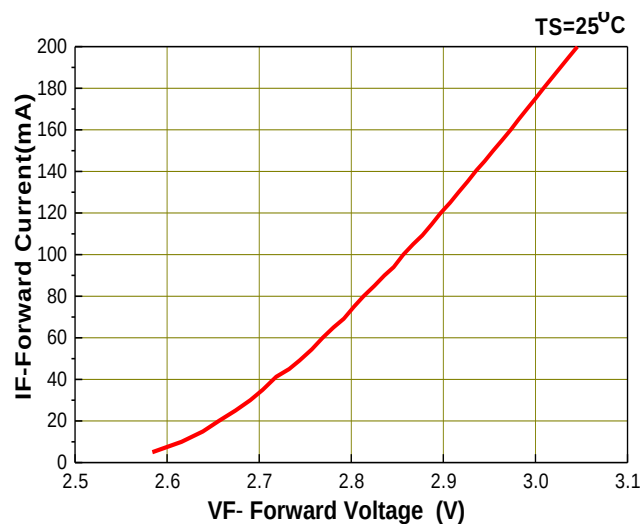


Fig.5 – Max. Driving Forward Current vs. Soldering Temperature

$R_{th\ j-s}=21\ ^\circ\text{C/W}$



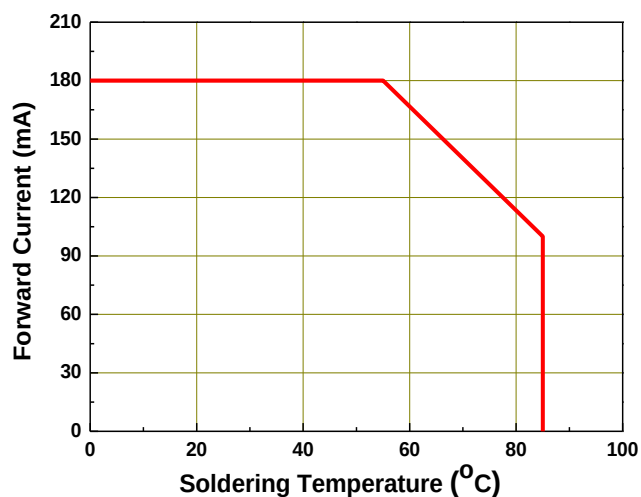


Fig.6 – Radiation Diagram

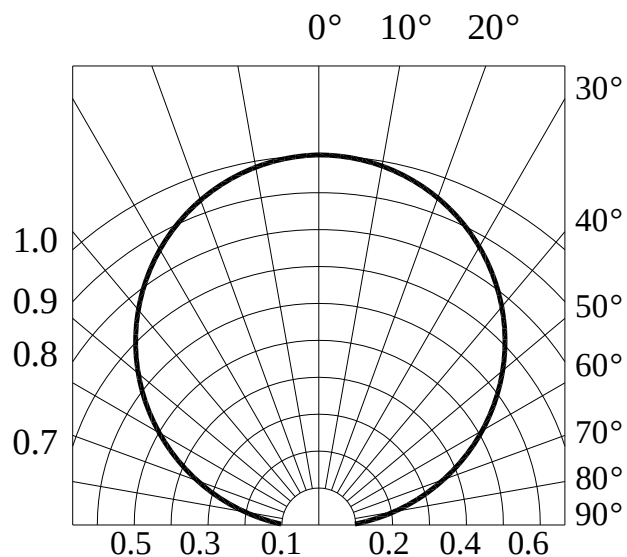

Package Dimension

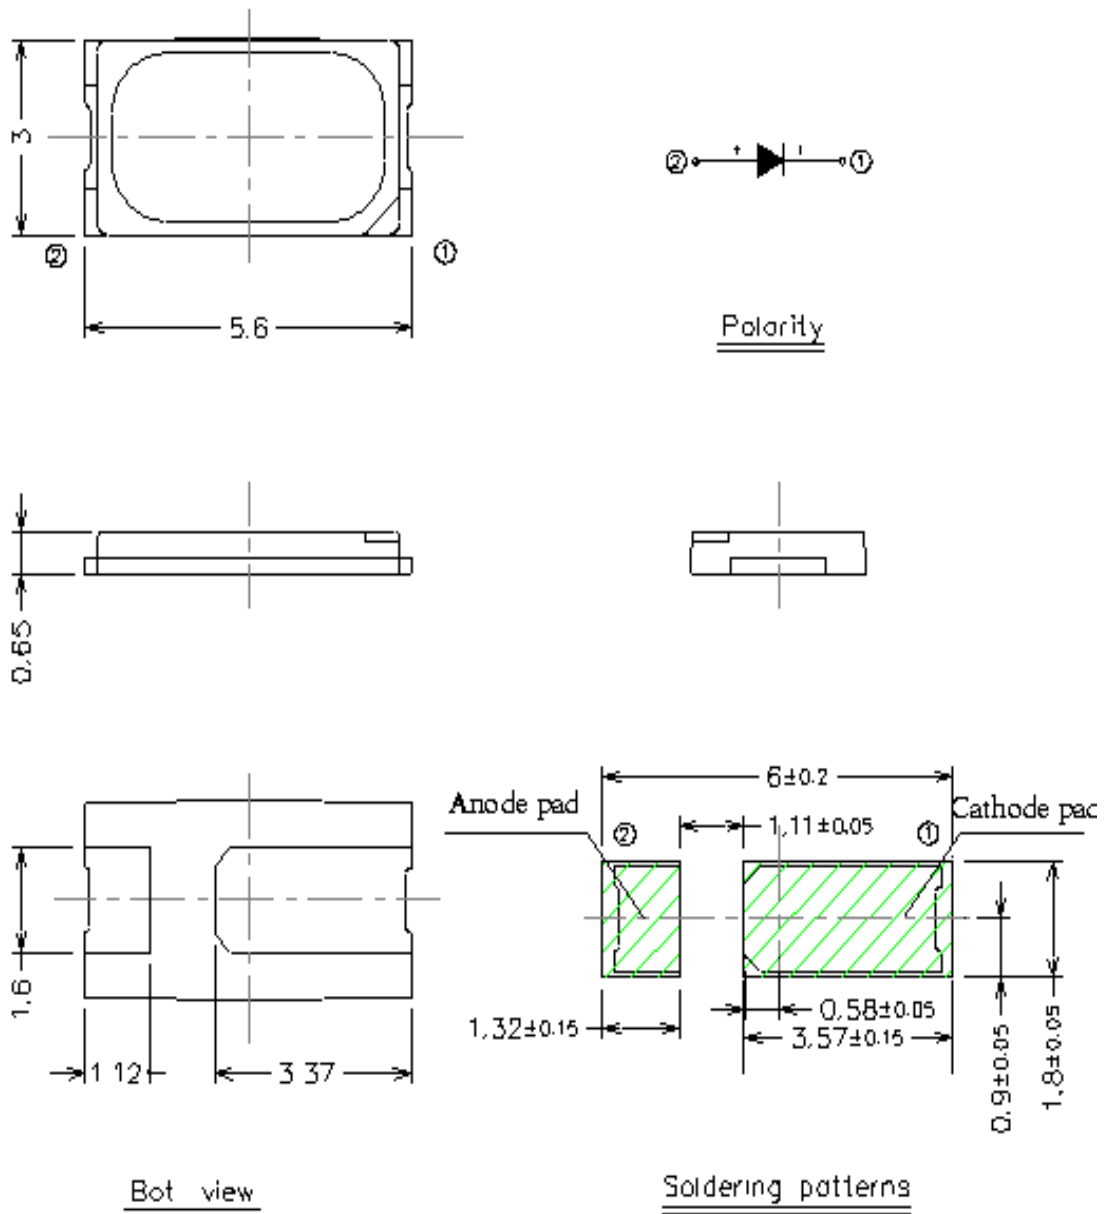


C

Note:
Tolerance unless mentioned is ± 0.15 mm; Unit = mm


Moisture Resistant Packing Materials

Label Explanation

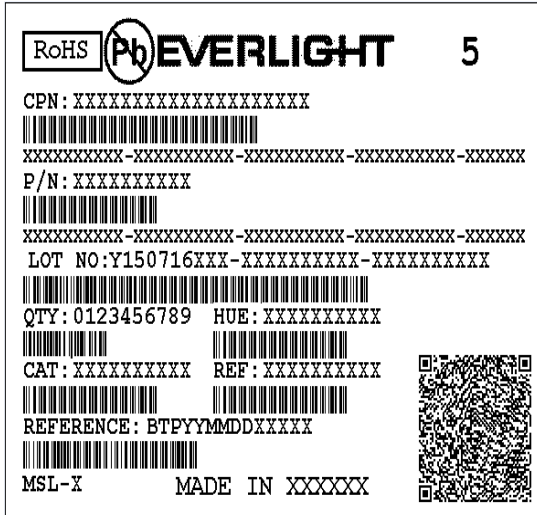


- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number

Reel Dimensions

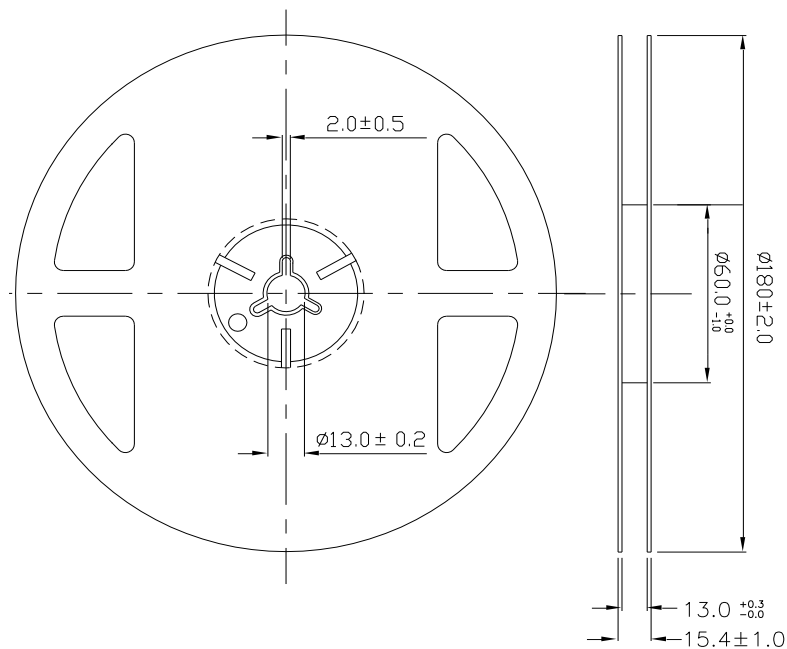

Note:
Tolerances unless mentioned $\pm 0.1\text{mm}$. Unit = mm


Carrier Tape Dimensions: Loaded Quantity 250/500/1000/2000/3000/4000 pcs Per Reel

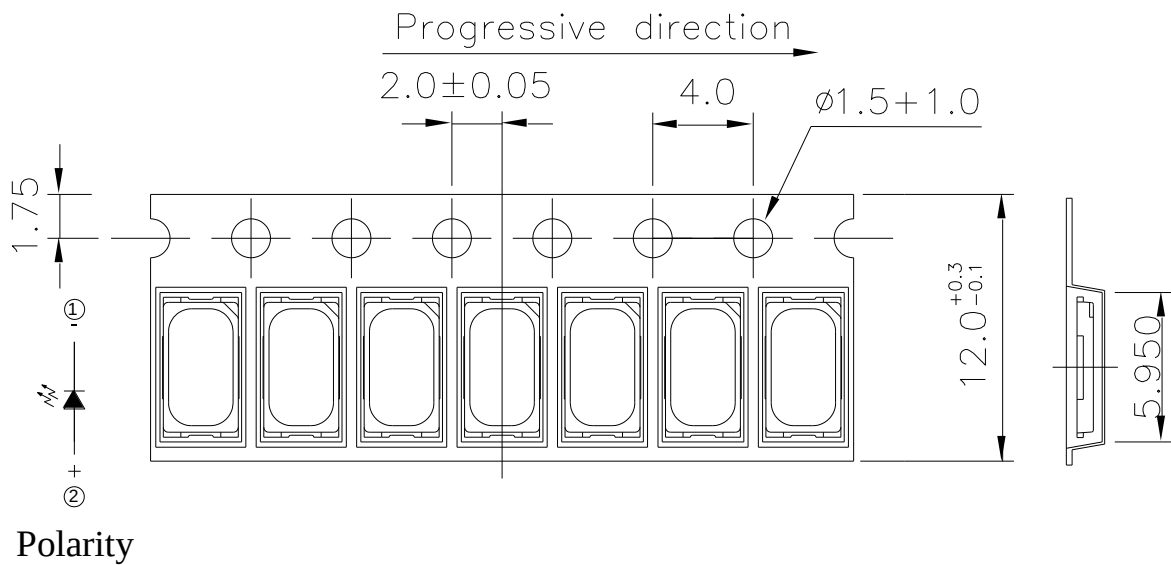

Note:

1. Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Moisture Resistant Packing Process

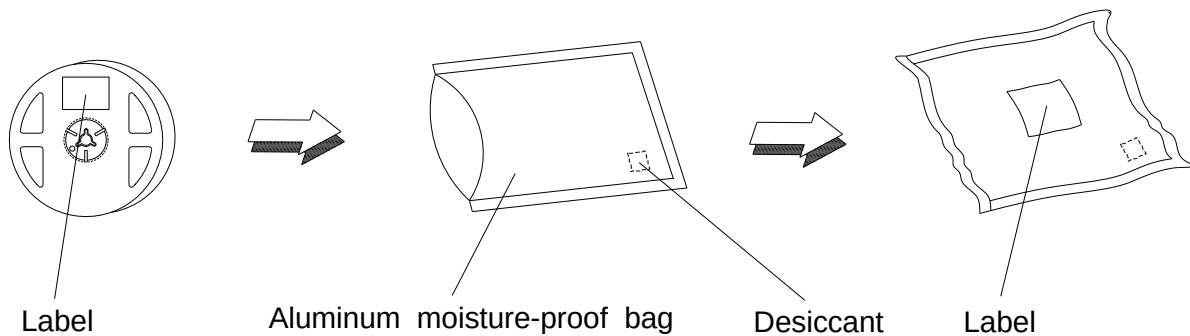

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C/10sec.	6 Min.	22 PCS.	0/1
2	Thermal Shock	H : +100°C 20min ┆ 10 sec L : -10°C 20min	500 Cycles	22 PCS.	0/1
3	Temperature Cycle	H : +100°C 30min ┆ 5 min L : -40°C 30min	500 Cycles	22 PCS.	0/1
4	High Temperature/Humidity Storage	Ta=85°C,85%RH	1000 Hrs.	22 PCS.	0/1
5	High Temperature/Humidity Operation	Ta=85°C,85%RH, I _F = 40 mA	1000 Hrs.	22 PCS.	0/1
6	Low Temperature Storage	Ta=-40°C	1000 Hrs.	22 PCS.	0/1
7	High Temperature Storage	Ta=85°C	1000 Hrs.	22 PCS.	0/1
8	Low Temperature Operation Life	Ta=-40°C, I _F = 75mA	1000 Hrs.	22 PCS.	0/1
9	High Temperature Operation/ Life#1	Ta=25°C, I _F = 75mA	1000 Hrs.	22 PCS.	0/1
10	High Temperature Operation/ Life#2	Ta=55°C, I _F =75 mA	1000 Hrs.	22 PCS.	0/1
11	High Temperature Operation/ Life#3	Ta=85°C, I _F = 40 mA	1000 Hrs.	22 PCS.	0/1

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

3. Soldering Condition

3.1 Pb-free solder temperature profile

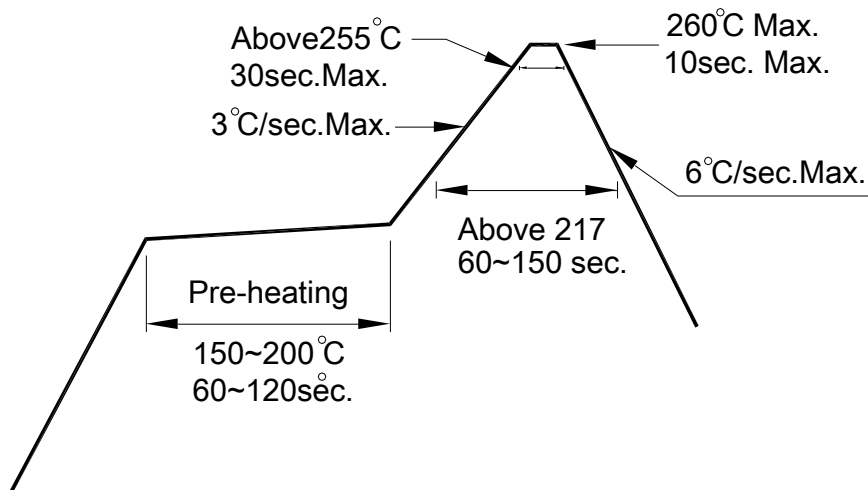

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

