



LIGHTING FOREVER

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Features

- Close responsively to the human eye spectrum
- Light to Current, analog output
- Good output linearity across wide illumination range
- Low sensitivity variation across various light sources
- Guaranteed temperature performance, -40°C to 85°C
- Wide supply voltage range, 2.5V to 5.5V
- Size : 5mm Lamp (Flat lens)
- RoHS compliant and Pb Free package



Description

The ALS-PT243-3C/L177/TR8 is a low cost ambient light sensor; It consists of a phototransistor in miniature SMD. EVERLIGHT ALS series products are good effective solution to the power saving of display backlighting of mobile appliances, such as the mobile phones, NB and PDAs. Due to the high rejection ratio of infrared radiation, the spectral response of the ambient light sensor is close to human eyes.


Applications

- Detection of ambient light to control display backlighting
 - Mobile devices – mobile phones, PDAs
 - Computing device – TFT LCD monitor for Notebook computer
 - Consumer device – TFT LCD TV, plasma TV, video camera, digital camera, toys
- Automatic residential and commercial management
- Automatic contrast enhancement for electronic signboard
- Ambient light monitoring device for daylight and artificial light
 - Street light, CCD/CCTV

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Package Dimensions

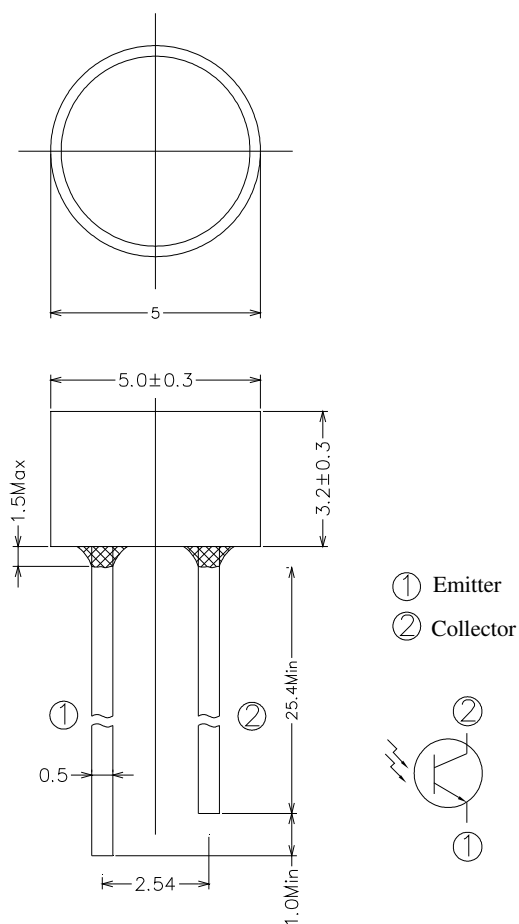

Notes: 1.All dimensions are in millimeters
2.Tolerances unless dimensions ± 0.1 mm



LIGHTING FOREVER

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{cc}	-0.5~6.0	V
Operating Temperature Range	T _{opr}	-40 ~ +85	°C
Storage Temperature Range	T _{stg}	-40 ~ +100	°C
Soldering Temperature Range [Note1]	T _{sol}	260 ± 10	°C

Note1: For detail reflow time and the recommended temperature profile, please refer to page 8.

Recommended Operating Conditions (Ta=25°C)

Parameter	Symbol	Min.	Max.	Unit
Operating Temperature	T _{opr}	-40	+85	°C
Supply Voltage	V _{cc}	2.5	5.5	V

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Electrical and Optical Characteristics (Ta=25°C)

Parameter	Symbol	MIN	TYP	MAX.	Unit	Test Condition
Dark Current	I_{CEO}	---	---	0.1	uA	$V_{CE}=10V$, $E_v=0Lux$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	---	---	0.4	V	$I_C=2mA$, $E_v=1000Lux$
Light Current	I_{PH1}	7	10	---	uA	$V_{CE}=5V$, $E_v=100Lux$ [Note1]
	I_{PH2}	200	230	---	uA	$V_{CE}=5V$, $E_v=1000Lux$ [Note1]
	I_{PH3}	950	110	---	uA	$V_{CE}=5V$, $E_v=1000Lux$ [Note2]
Photocurrent Ratio	I_{PH3} / I_{PH2}	---	4.8	---	---	$V_{CE}=5V$, $E_v=1000Lux$
Saturation Output Voltage	V_o	4.5	4.6	---	V	$V_{CC}=5V$, $E_v=1000Lux$ $R_L=75K$ [Note2]
Peak Sensitivity Wavelength	λ_p	---	630	---	nm	
Sensitivity Wavelength Range	λ	390	---	700	nm	
Rise time	t_r	---	0.11	---	ms	$V_{CC} = 5V$ $R_L = 7.5K\Omega$
Fall time	t_f	---	0.22	---	ms	
Angle of half Sensitivity	$2\theta_{1/2}$	---	143	---	Deg.	$I_F = 20mA$

Note:

1. White Fluorescent light (Color Temperature = 6500K) is used as light source. However, White LED is substituted in mass production.
2. Illuminance by CIE standard illuminant-A / 2856K, incandescent lamp.

Typical Electrical and Optical Characteristics Curves

Fig.1 Light Current vs. Illuminance

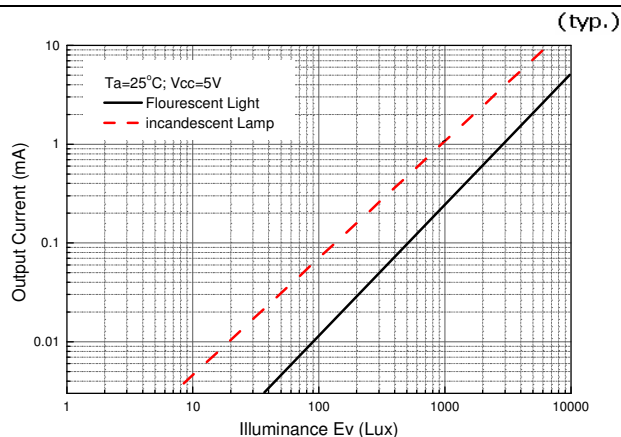


Fig.2 Output Voltage vs. Illuminance

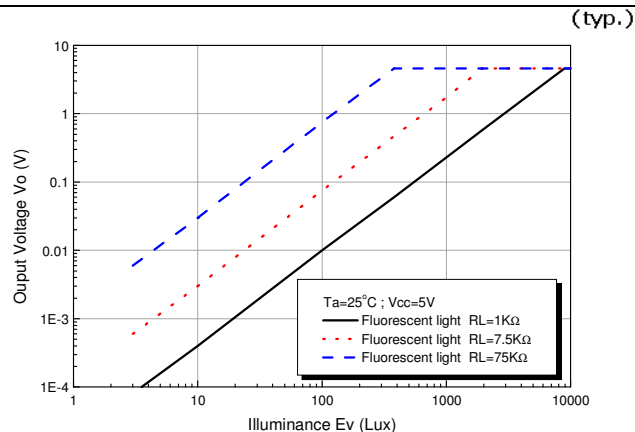


Fig.3 Spectral Response

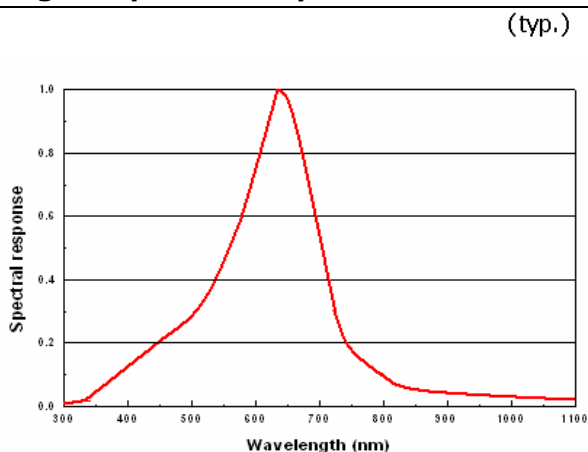


Fig.4 Light current vs. Supply Voltage

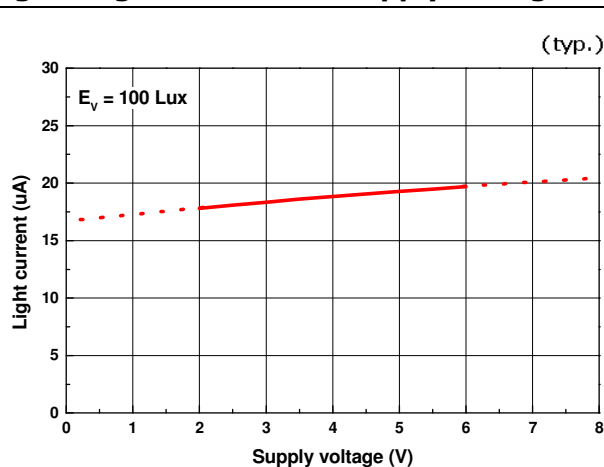


Fig.5 Light Current vs. Temperature



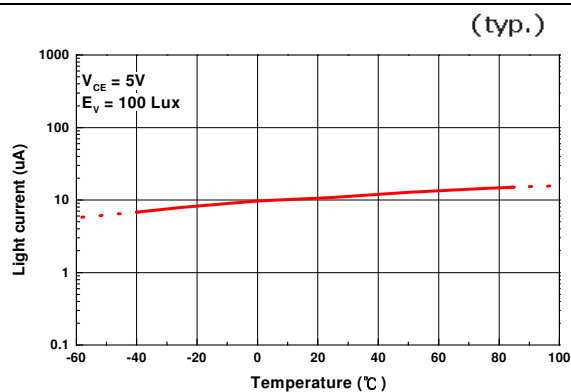


Fig.6 Dark Current vs. Temperature

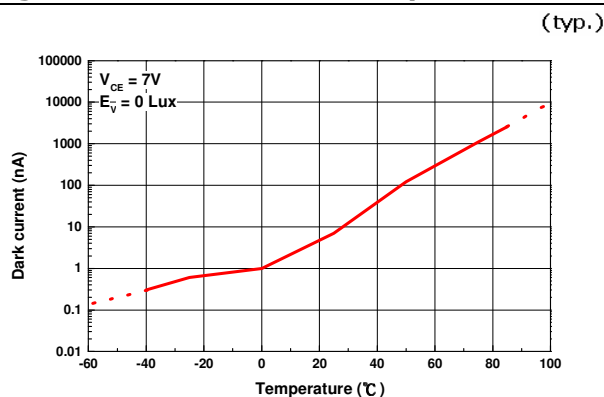

Converting Photocurrent to Voltage

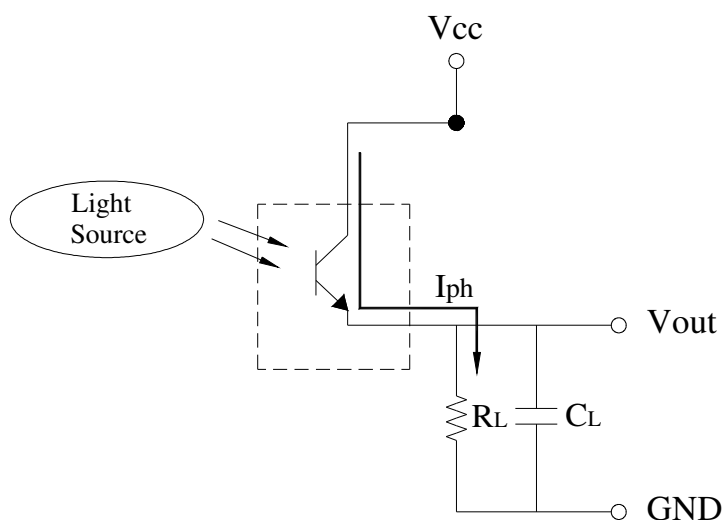

Note:

1. The output voltage (V_{out}) is the product of photocurrent (I_{PH}) and loading resistor (R_L)
2. A right loading resistor shall be chosen to meet the requirement of maximum ambient light, and output saturation voltage:

$$V_{out(max.)} = I_{out(max.)} \times R_L \leq V_{out(saturation)} = V_{cc} - 0.4V$$



LIGHTING FOREVER

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Packing Quantity Specification

1.500PCS/1Bag , 5Bags/1Box

2.10Boxes/1Carton

Label Format

EVERLIGHT		○
CPN: XXXXXX		
P/N: XXXXXX		
	RoHS	
XXXXXXXXXXXX		
QTY: XXXX	CAT:	
	HUE:	
LOT NO: XXXXXXXX	REF:	
		
MADE IN TAIWAN		



LIGHTING FOREVER

5mm T-1 3/4 Ambient Light Sensor

ALS-PT243-3C/L177

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.